


Generation Interconnection Station Reclosing Scheme Example

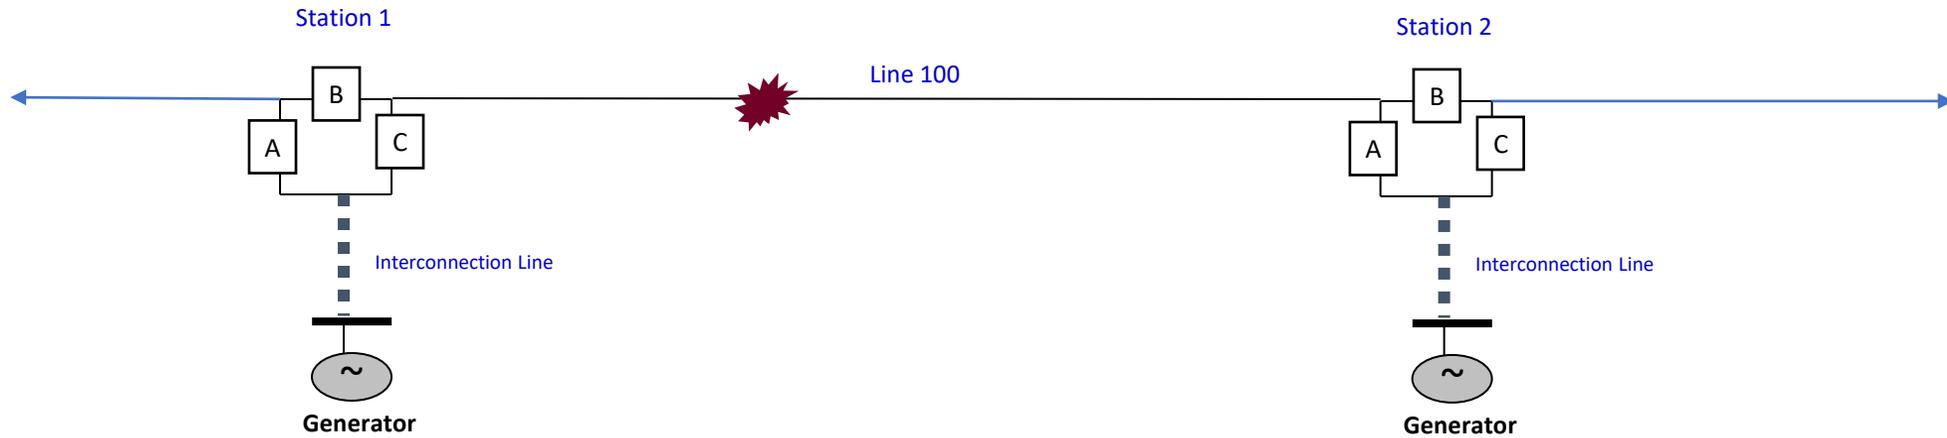

Station 1 – Line 100: Reclosing Scheme
(Test Terminal) – 10 seconds open interval, then supervised reclose on Hot Line or Sync-check only. {to reduce impact on Generator}

Station 2 – Line 100: Reclosing Scheme
(Non-Test Terminal) – 11 seconds open interval, then supervised reclose on sync-check only. {to reduce impact on Generator}

- Reclosing Supervision scheme on both ends of Line 100 resulted in a failure to reclose event
- Corrective Action Items:
 - Station 1 CB B/C line relays were updated to include Dead Line supervision to become truly the Test Terminal of the line
 - Training to ensure both ends of the line are considered when setting reclosing schemes especially with special Generator interconnection schemes